

# Marine and jet biofuel production via hydrotreating of Triacylglycerides



A. Dimitriadis\*, V. Vasdekis\*, C. Kekes\*, S. Bezergianni\*

- Centre for Research & Technology Hellas (CERTH),
- Chemical Process and Energy Resources Institute (CPERI) Thessaloniki, 57001, Greece  
(E-mail: [adimitr@certh.gr](mailto:adimitr@certh.gr))


## Introduction

The aim of the current research is focused:

- On the upgrading of bio-based triacylglycerides (TAGs) via hydroprocessing to marine and jet bio-fuels.
- Biogenic residues and wastes were gasified and the syngas was fermented to produce bio-based triacylglycerides (TAGs).
- All Hydrotreating experiments performed in a TRL 3 continuous flow, pilot-scale hydroprocessing plant VB01 of the Chemical Process & Energy Resources Institute (CPERI) of the Center for Research and Technology Hellas (CERTH) (Picture 1&2).
- A commercial hydrotreating catalyst was employed.
- The effect of hydrotreating operating parameters was investigated (Table 1)



Picture 1: TRL 3 Hydrotreating unit

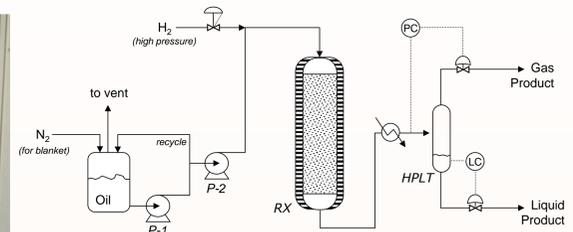

Parameters	Units	Cond. 1	Cond. 2	Cond. 3
Temperature	°C	350	360	375
Pressure	psi	1450	1450	1450
H2/Oil ratio	scfb	5930	5930	5930
LHSV	hr <sup>-1</sup>	1	1	1

Table 1: Operating testing window

## Results & Discussion

Feed:

For the purpose of the current investigation, biogenic residues and wastes were gasified and the syngas was fermented to produce bio-based triacylglycerides (TAGs). However, due to the limited availability of the feedstock, the TAGs were simulated via a model compound.

The fatty acid composition of the TAGs was analyzed and a model compound was developed simulating their composition via a blend of four commercial vegetable oils (Palm oil, Flaxseed oil, Olive oil and Pumpkin oil). Model compound can simulate the fatty acid composition of TAGs by ~80% (Figure 1)

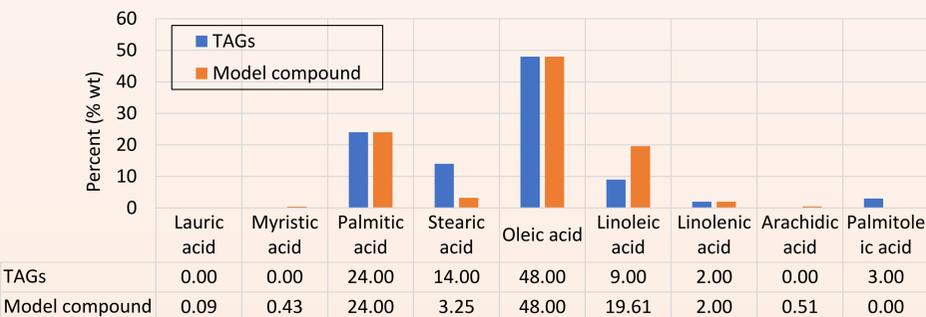


Figure 1: Fatty acid composition from TAGs & model compound

Products:

- Hydrotreating increased the hydrogen content in all products increasing in that way the energy content of the produced fuels (Figure 2)

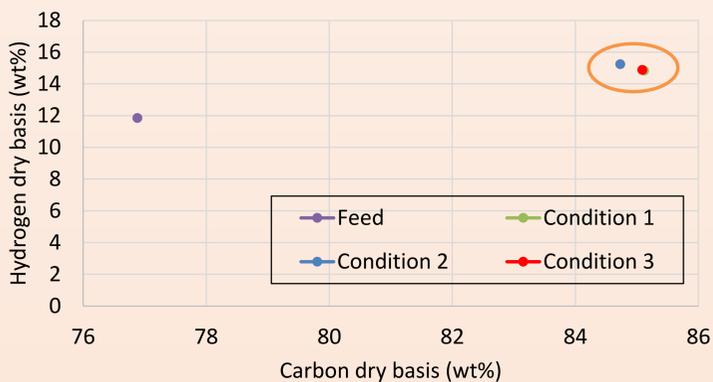


Figure 2: H and C elemental composition on dry basis of feeds and products after hydrotreatment

Marine diesel and jet fuel range hydrocarbons were produced via hydrotreating of TAGs (Figure 3)

- Cond. 1: 41 wt% Jet-fuel & 59 wt% Marine diesel fuel
- Cond. 2: 35 wt% Jet-fuel & 65 wt% Marine diesel fuel
- Cond. 3: 56 wt% Jet-fuel & 42 wt% Marine diesel fuel

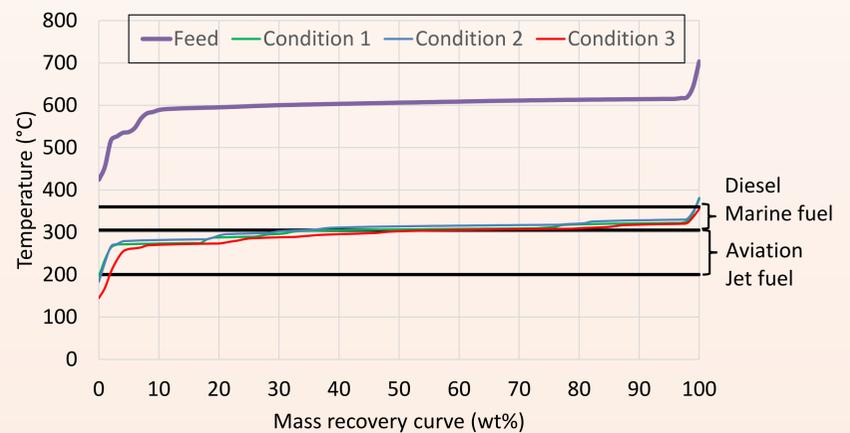


Figure 3: Feed & product mass recovery curve

- An increase of temperature favor hydrodeoxygenation reactions leading to a less oxygenate product but with higher H<sub>2</sub> consumption during the process (Figure 4)

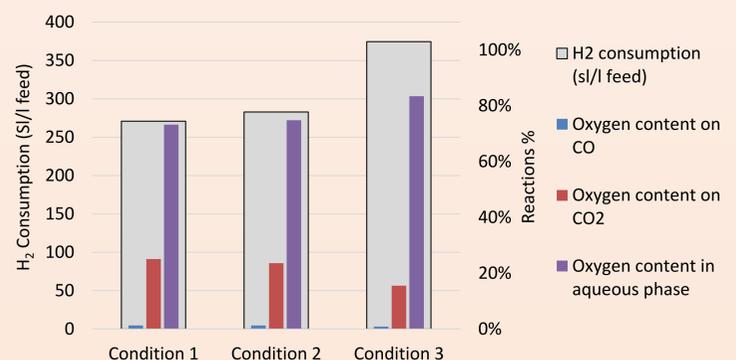


Figure 4: Oxygen distribution in gas and liquid products

## Conclusions

- TAGs were simulated via a blend of various commercial vegetable oils with an accuracy of ~80%
- Hydrotreating of the model compound has led to ~56 wt% jet fuel and ~42 wt% marine diesel range hydrocarbons
  - Operating hydrotreating window influence the mass product yields and oxygen removal reaction pathway
- Optimum condition No. 3, higher jet and marine fuel yields while the oxygen is removed mostly via hydrodeoxygenation instead of decarbonylation a& decarboxylation reactions

## Acknowledgement

The current work has received funding from the European Union's Horizon 2020 research and innovation programme under Grant Agreement No 884208. Project name "BioSFera" (Biofuels production from Syngas FERmentation for Aviation and maritime use)

